


H500SF

THERMAL FOGGER

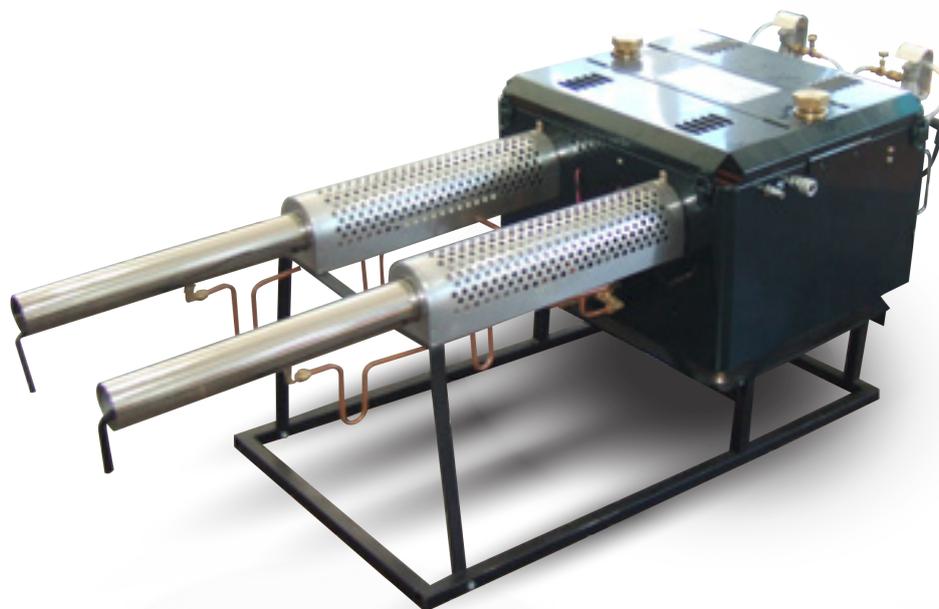

SPECIFICATIONS

TANK CAPACITY	150 LITERS 40 GAL
FUEL CAPACITY	15 LITERS 4 GAL
FUEL CONSUMPTION	4.3 LPH
FLOW RATE	300 LPH OIL (110 LPH WATER)
DROPLET SIZE	5 – 30 MICRONS
FUEL	PETROL
NET WEIGHT	120 KG 265 LBS
DIMENSIONS	162 X 72 X 80 CM 64 X 28 X 31 IN

Engineered with you in mind. Spray up to 40 meters (131 feet) with the remote-controlled dual resonators on the H500SF Truck Mounted Thermal Fogger. Save valuable time and maximize your yield. The large 150-liter high-grade stainless-steel tank and a flow rate of up to 300 LPH make it ideal for applying pesticides, disinfectants, herbicides, fungicides and odor neutralizers in large-sized locations.

All content © Vectorfog. Any use of this material without express written consent is prohibited.

New Jersey, United States | Seoul, South Korea
Amsterdam, Netherlands | www.vectorfog.com
info@vectorfog.com | 1 844 780 6711

VECTORFOG®
EXPERTS IN FOGGING TECHNOLOGY™